**Fabas Luce S.p.a.**
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

# Skilos

Skilos recessed ceiling is a lighting fixture with a 600x600mm modular structure. Provided with an optical system which allows excellent visual comfort, the microprismatic screen guarantees a UGR<19 factor. Equipped with the latest generation of very high efficiency LEDs, 4000K natural light, CRI 90. The IP65 protection degree is guaranteed both on the visible side and on the recessed side. Particularly suitable for operating, aseptic, chemical and food premises. Possibility to have custom-made dimensions.

| | |
|---|---|
| **Artikelnummer** | **6524-34-705** |
| **Typ** | Einbauleuchte |
| **Designer** | S.T. Fabas Luce |
| **EAN** | 8019282552765 |
| **Zolltarif** | 94054239 |
| **Farbe** | Weiß |
| **Material** | Metall / Klar prismatik Diffusor |
| **IP** | IP65 |
| **IK** | 04 |
| **Isolierklasse** | CL1 |
| **Operating ambient temperature** | -20°C +45°C |
| **Jahre Garantie** | 5 |
| **Artikelmaße** | 600x600x103mm - 9.3kg |
| **Verpackungsmaße** | 650x650x150mm - 10.6kg |
| | **Bestückung 1** |
| **Bestückung** | LED Eingebaut |
| **LED Merkmale** | SMD |
| **Lumen der Lichtquelle** | 4222 lm |
| **Lumen des Artikels** | 4485 lm |
| **Farbtemperatur** | naturweiss 4000 K |
| **Diffusor** | Prismatisch |
| **Minimaler CRI** | >90 |
| **UGR** | <19 |
| **Energieklasse** | A↑G C |
| | **Elektrische Spezifikationen 1** |
| **Eingangsspannung** | 220/240V AC 50/60Hz |
| **Gesamtabsorbierte Leistung** | 25W |
| **Treiber** | Inklusiv |
| **Leistungsfaktor** | > 0.9 |
| **Steuerungssystem** | DALI/Push/On-Off |

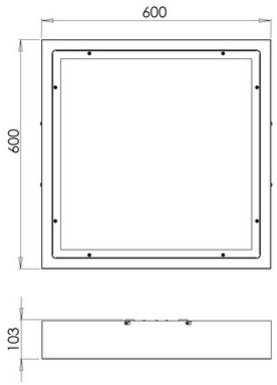


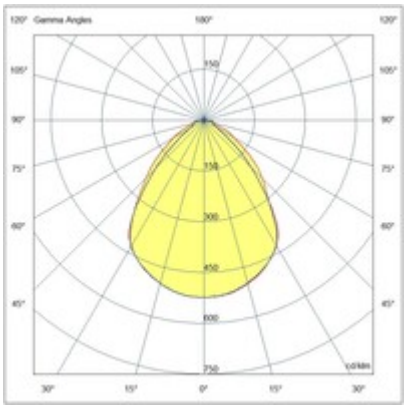

CE