





Skilos

Skilos recessed for plasterboard false ceilings is a lighting fixture with a 600x600mm modular structure. Provided with an optical system which allows excellent visual comfort, the microprismatic screen guarantees a UGR<19 factor. Equipped with the latest generation of very high efficiency LEDs, 4000K natural light, CRI 90. The IP65 protection degree is guaranteed both on the visible side and on the recessed side. Particularly suitable for operating, aseptic, chemical and food premises. Possibility to have custom-made dimensions.

Code	6524-24-705
Type	Recessed lamp
Designer	S.T. Fabas Luce
Eancode	8019282552741
Customs tariff	94054239
Color	White
Material	Metal frame / Clear prismatic diffuser
IP	IP65
IK	04
Insulation Class	 CL1
Operating ambient temperature	-20°C +45°C
Years of warranty	5
Item Dimensions	610x610x120mm - 7.0kg
Packaging Dimensions	650x650x150mm - 8.3kg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Light Source Lumen	4222 lm
Item Lumen	3231 lm
Color Temperature	Natural white 4000 K
Optics	Prismatic
Minimum CRI	>90
UGR	<19
Energy Efficiency Class	 C
Electrical specifications 1	
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	25W
Driver	Included
Power Factor	> 0.9
Control System	DALI/Push/On-Off

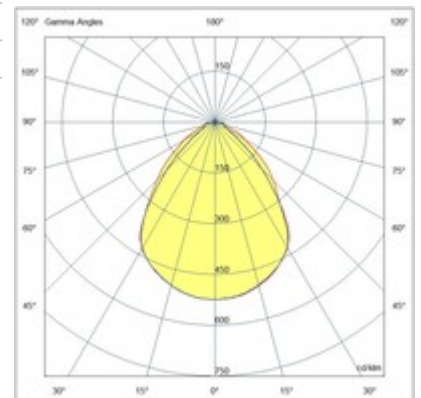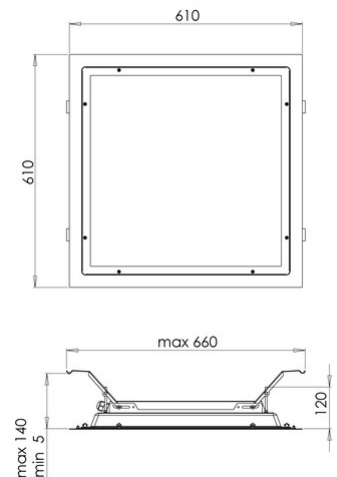

CE