





## Skilos

Skilos recessed ceiling is a lighting fixture with a 600x600mm modular structure. Provided with an optical system which allows excellent visual comfort, the microprismatic screen guarantees a UGR<19 factor. Equipped with the latest generation of very high efficiency LEDs, 4000K natural light, CRI 90. The IP65 protection degree is guaranteed both on the visible side and on the recessed side. Particularly suitable for operating, aseptic, chemical and food premises. Possibility to have custom-made dimensions.

<b>Code</b>	<b>6524-34-715</b>
<b>Type</b>	Recessed lamp
<b>Designer</b>	S.T. Fabas Luce
<b>Eancode</b>	8019282552758
<b>Customs tariff</b>	94054239
<b>Color</b>	White
<b>Material</b>	Metal frame / Clear prismatic diffuser
<b>IP</b>	IP65
<b>IK</b>	04
<b>Insulation Class</b>	 CL1
<b>Operating ambient temperature</b>	-20°C +45°C
<b>Years of warranty</b>	5
<b>Item Dimensions</b>	600x600x103mm - 9.3kg
<b>Packaging Dimensions</b>	650x650x150mm - 10.6kg
<b>Light Source 1</b>	
<b>Light source</b>	LED Built-in
<b>LED Characteristics</b>	SMD
<b>Light Source Lumen</b>	5861 lm
<b>Item Lumen</b>	4485 lm
<b>Color Temperature</b>	Natural white 4000 K
<b>Optics</b>	Prismatic
<b>Minimum CRI</b>	>90
<b>UGR</b>	<19
<b>Energy Efficiency Class</b>	 A ↑ G C
<b>Electrical specifications 1</b>	
<b>Input Voltage</b>	220/240V AC 50/60Hz
<b>Total Absorbed Power</b>	35W
<b>Driver</b>	Included
<b>Power Factor</b>	> 0.9
<b>Control System</b>	DALI/Push/On-Off

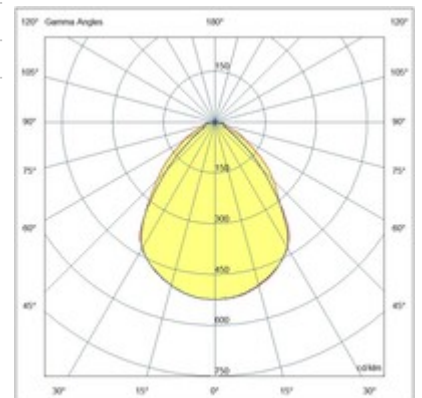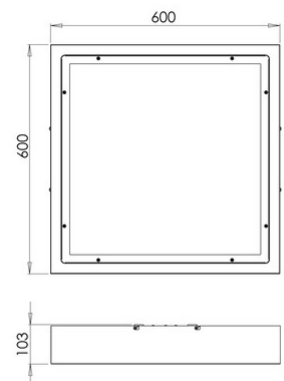

CE