
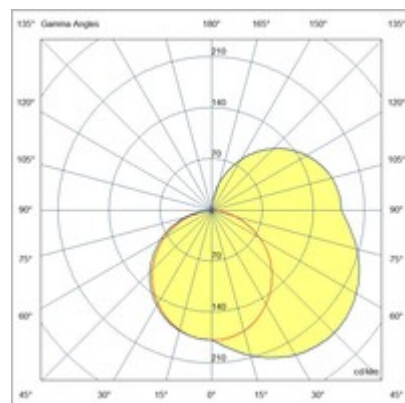


Ermes Opal light line corner

LED linear module designed for use in all ERMES system profiles. Opal polycarbonate diffuser, available in three lengths, two color temperatures, On-Off or DALI. The module can be integrated with other devices of the Ermes family, making it versatile for different applications (residential, commercial, industrial). In particular, the compined use with the corner modules allows you to create hgly customized lighting configurations that can be adapted to any need,

Code	6525-43-266
Type	Light Line Profiles
Eancode	8019282551553
Customs tariff	94051190
Color	Black
Material	Aluminum frame
IP	IP20
IK	04
Insulation Class	 CL3
Operating ambient temperature	-20°C + 35°C
Years of warranty	3
Item Dimensions	312x312x44mm - 0.3kg
Packaging Dimensions	340x360x60mm - 0.4kg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Light Source Lumen	2236 lm
Item Lumen	992 lm
Color Temperature	Warm White 2700K
Optics	Diffused beam
Minimum CRI	>90
Energy Efficiency Class	 F
Electrical specifications 1	
Input Voltage	48V DC
Total Absorbed Power	20W
Control System	DALI



CE