


Turner Suspension double emission

Modular linear profile in extruded aluminum, with opal or microprismatic polycarbonate diffuser UGR<19. Available in 29W+15W/m. warm white or natural. Integrated power supply for On/Off and DALI; emergency module available on demand. Suitable to be installed as suspension in the bidirectional configuration. Complete with suspension and power cable max 2m.

Code	6853-54-202	
Type	Light Line Profiles - Suspension double emission	
Designer	S.T. Fabas Luce	
Eancode	8019282093732	
Customs tariff	94054239	
Color	White	
Material	Aluminum frame	
IP	IP40	
IK	08	
Insulation Class		
Operating ambient temperature	-20C° +45°	
Years of warranty	5	
Made In	Italy	
Item Dimensions	77x95xMax 2000mm - 3,950/mtkg	
	Light Source 1	Light Source 2
Light source	LED Built-in	LED Built-in
LED Characteristics	SMD	SMD
Number of LEDs	70 LED/m + 140 LED/m	140 LED/mt
Light Source Lumen	3570 lm/m	1440 lm/m
Item Lumen	2308 lm/m	1185 lm/m
Color Temperature	Natural white 4000 K	Natural white 4000 K
Optics	Prismatic	Opal
Typical CRI	85	
Minimum CRI	80	80
Luminous Flux Maintenance	>100.000 h L70 B50	>80.000 h L70 B50
UGR	<19	
Energy Efficiency Class		
	Electrical specifications 1	Electrical specifications 2
Input Voltage	220/240V AC 50/60Hz	220/240V AC 50/60Hz
Total Absorbed Power	29W/ml	15W/ml
Driver	Included	Included
Control System	On/Off	On/Off
Power Supply Type	Costant Current	Costant Current
Driver Output	24V DC	24V DC
Driver Input	220 - 240 VAC 50/60 Hz	220 - 240 VAC 50/60 Hz

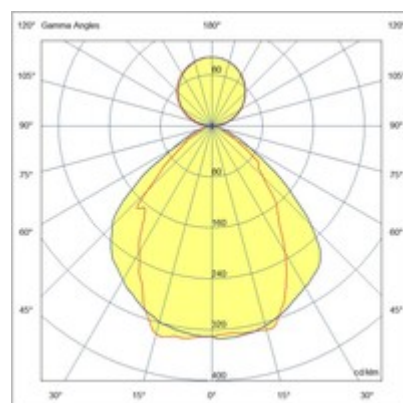

CE