




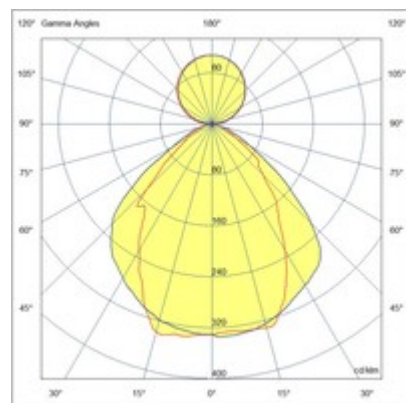
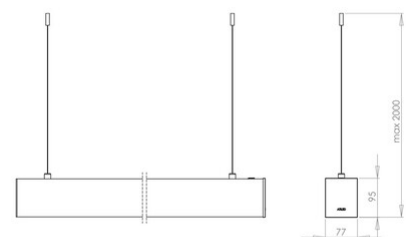
## Turner Suspension double emission

Modular linear profile in extruded aluminum, with opal or microprismatic polycarbonate diffuser UGR<19. Available in 29W+15W/m. warm white or natural. Integrated power supply for On/Off and DALI; emergency module available on demand. Suitable to be installed as suspension in the bidirectional configuration. Complete with suspension and power cable max 2m.

|                                      |   |
|--------------------------------------|---|
| <b>Code</b>                          | <b>6853-62-222</b>  |
| <b>Type</b>                          | Light Line Profiles - Suspension double emission                                      |
| <b>Designer</b>                      | S.T. Fabas Luce   |
| <b>Eancode</b>                       | 8019282534396   |
| <b>Customs tariff</b>                | 94054239  |
| <b>Color</b>                         | Black   |
| <b>Material</b>                      | Aluminum frame  |
| <b>IP</b>                            | IP40  |
| <b>IK</b>                            | 08  |
| <b>Insulation Class</b>              |  CL1 |
| <b>Operating ambient temperature</b> | -20C° +45°  |
| <b>Years of warranty</b>             | 5   |
| <b>Made In</b>                       | Italy   |
| <b>Item Dimensions</b>               | 77x95xMax 2000mm - 3,950/mtkg   |

|                                  | <b>Light Source 1</b>   | <b>Light Source 2</b>   |
|----------------------------------|---|---|
| <b>Light source</b>              | LED Built-in  | LED Built-in  |
| <b>LED Characteristics</b>       | SMD   | SMD   |
| <b>Number of LEDs</b>            | 70 LED/m  | 140 LED/mt  |
| <b>Light Source Lumen</b>        | 3470 lm/m   | 1290 lm/m   |
| <b>Item Lumen</b>                | 2146 lm/m   | 1131 lm/m   |
| <b>Color Temperature</b>         | Warm white 3000K  | Warm white 3000K  |
| <b>Optics</b>                    | Prismatic   | Opal  |
| <b>Typical CRI</b>               | 85  |   |
| <b>Minimum CRI</b>               | 80  | 80  |
| <b>Luminous Flux Maintenance</b> | >100.000 h L70 B50  | >80.000 h L70 B50   |
| <b>UGR</b>                       | <19   |   |
| <b>Energy Efficiency Class</b>   |  E |  E |

|                             | <b>Electrical specifications 1</b> | <b>Electrical specifications 2</b> |
|-----------------------------|------------------------------------|------------------------------------|
| <b>Input Voltage</b>        | 220/240V AC 50/60Hz                | 220/240V AC 50/60Hz                |
| <b>Total Absorbed Power</b> | 29W/ml                             | 15W/ml                             |
| <b>Driver</b>               | Included                           | Included                           |
| <b>Control System</b>       | DALI                               | DALI                               |
| <b>Power Supply Type</b>    | Costant Current                    | Costant Current                    |
| <b>Driver Output</b>        | 24V DC                             | 24V DC                             |
| <b>Driver Input</b>         | 220 - 240 VAC 50/60 Hz             | 220 - 240 VAC 50/60 Hz             |



CE