





# Nizza

High efficiency floodlight for functional and architectural lighting. Suitable especially for outdoor areas. It has a wide range of optics to meet all design needs. Device made of die-cast aluminum copper free EN AB 44100. Polyester painting QUALICOAT (Class 1), corrosion resistant to salt spray for 28 days, conforms to Standard IEC60092-306. Available in grey color RAL 7040, INOX brackets.

Code	6876-04-424	
Type	Outdoor Projector	
Designer	S.T. Fabas Luce	
Eancode	8019282103011	
Customs tariff	94054239	
Color	Shiny anodized aluminum	
Material	Aluminum frame	
IP	IP66	
IK	08	
Insulation Class	 CL1	
Operating ambient temperature	-25°C +50°C	
Years of warranty	5	
Made In	Italy	
Item Dimensions	400x100x170,50mm - 2,60kg	
Packaging Dimensions	485x125x190mm - 2.9kg	
	<b>Light Source 1</b>	
Light source	LED Built-in	
LED Characteristics	Power LED	
Light Source Lumen	6700 lm	
Item Lumen	4780 lm	
Color Temperature	Natural white 4000 K	
Optics	Elliptical	
Minimum CRI	>80	
Luminous Flux Maintenance	60.000h L70 B50	
Energy Efficiency Class		
	<b>Electrical specifications 1</b>	
Input Voltage	100/240V AC 50/60Hz	
Total Absorbed Power	54W	
Driver	Included	
Power Factor	>0,9	
Control System	On/Off	

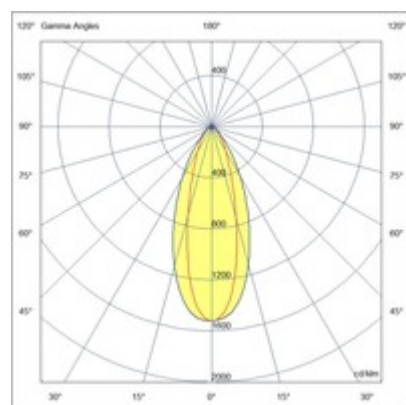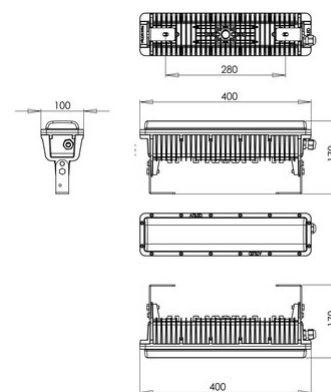

CE