





## Egeo 105W

High efficiency floodlight for functional and architectural lighting. Suitable especially for outdoor areas. It has a wide range of optics to meet all design needs. Device made of die-cast aluminum copper free EN AB 44100. Polyester painting QUALICOAT (Class 1), corrosion resistant to salt spray for 28 days, conforms to Standard IEC60092-306. Available in grey color RAL 7040, INOX brackets.

<b>Code</b>	<b>6915-04-324</b>
<b>Type</b>	Outdoor Projector
<b>Designer</b>	S.T. Fabas Luce
<b>Eancode</b>	8019282106074
<b>Customs tariff</b>	94054239
<b>Color</b>	Grey RAL 7040
<b>Material</b>	Aluminum frame
<b>IP</b>	IP65
<b>IK</b>	07
<b>Insulation Class</b>	 CL1
<b>Operating ambient temperature</b>	-20°C +50°C
<b>Years of warranty</b>	5
<b>Made In</b>	Italy
<b>Item Dimensions</b>	384x123x319mm - 6.9kg
<b>Packaging Dimensions</b>	420x420x170mm - 7.3kg
<b>Light Source 1</b>	
<b>Light source</b>	LED Built-in
<b>LED Characteristics</b>	Power LED
<b>Light Source Lumen</b>	12650 lm
<b>Item Lumen</b>	11400 lm
<b>Color Temperature</b>	Natural white 4000 K
<b>Optics</b>	63°
<b>Minimum CRI</b>	>80
<b>Luminous Flux Maintenance</b>	60.000h L70 B50
<b>Energy Efficiency Class</b>	 E
<b>Electrical specifications 1</b>	
<b>Input Voltage</b>	220/240V AC 50/60Hz
<b>Total Absorbed Power</b>	105W
<b>Driver</b>	Included
<b>Power Factor</b>	>0,9
<b>Control System</b>	On/Off

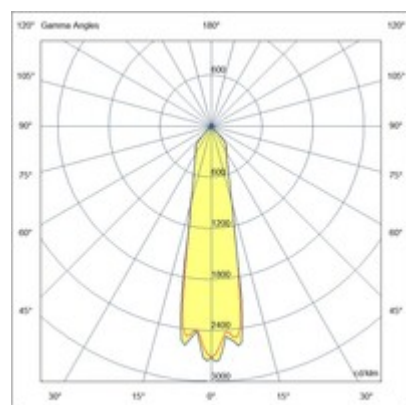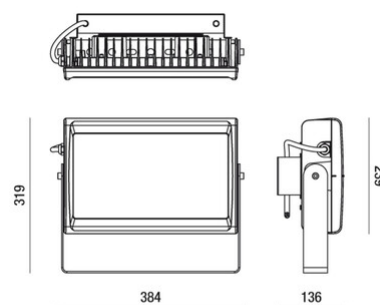

CE