





## Millet Ceiling lamp

Extruded aluminum profile with cuts every 10 cm, with opal or prismatic polycarbonate diffuser UGR<19. Available in Warm 169 lm/W or Natural white 180 lm/W temperatures with mid power led 23W/m. Integrated power supply for On/Off and DALI power supplies, emergency module available on demand. Prepared to be installed on the ceiling or on the wall, both vertically and horizontally.

<b>Code</b>	<b>6967-22-121</b>
<b>Type</b>	Light Line Profiles – Ceiling lamp
<b>Designer</b>	S.T. Fabas Luce
<b>Eancode</b>	8019282519508
<b>Customs tariff</b>	94054239
<b>Color</b>	Aluminum
<b>Material</b>	Aluminum frame and polycarbonate
<b>IP</b>	IP40
<b>IK</b>	08
<b>Insulation Class</b>	 CL1
<b>Operating ambient temperature</b>	-25C° +45C°
<b>Years of warranty</b>	5
<b>Made In</b>	Italy
<b>Item Dimensions</b>	46x70mm - 2,20m/kg
<b>Packaging Dimensions</b>	1x1mm - 4kg

<b>Light Source 1</b>	
<b>Light source</b>	LED Built-in
<b>LED Characteristics</b>	SMD
<b>Number of LEDs</b>	80 LED/mt
<b>Light Source Lumen</b>	3380 lm/m
<b>Item Lumen</b>	2124 lm/m
<b>Color Temperature</b>	Warm white 3000K
<b>Optics</b>	Opal
<b>Typical CRI</b>	85
<b>Minimum CRI</b>	80
<b>Luminous Flux Maintenance</b>	>100.000 h L80 B10
<b>Energy Efficiency Class</b>	

<b>Electrical specifications 1</b>	
<b>Input Voltage</b>	220/240V AC 50/60Hz
<b>Total Absorbed Power</b>	23W/ml
<b>Driver</b>	Included
<b>Control System</b>	DALI
<b>Power Supply Type</b>	Costant Current
<b>Driver Output</b>	350mA
<b>Driver Input</b>	220 - 240 VAC 50/60 Hz

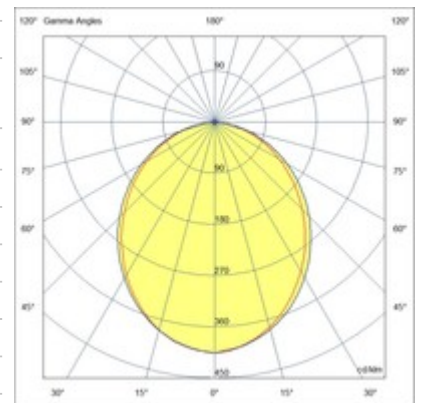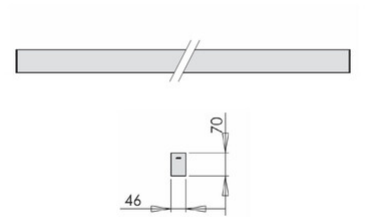

CE