
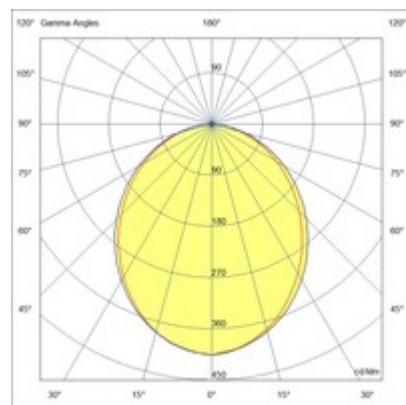


Millet Ceiling lamp

Extruded aluminum profile with cuts every 10 cm, with opal or prismatic polycarbonate diffuser UGR<19. Available in Warm 169 lm/W or Natural white 180 lm/W temperatures with mid power led 23W/m. Integrated power supply for On/Off and DALI power supplies, emergency module available on demand. Prepared to be installed on the ceiling or on the wall, both vertically and horizontally.

Code	6967-22-121
Type	Light Line Profiles – Ceiling lamp
Designer	S.T. Fabas Luce
Eancode	8019282519508
Customs tariff	94054239
Color	Aluminum
Material	Aluminum frame and polycarbonate
IP	IP40
IK	08
Insulation Class	 CL1
Operating ambient temperature	-25C° +45C°
Years of warranty	5
Made In	Italy
Item Dimensions	46x70mm - 2,20m/kg
Packaging Dimensions	1x1mm - 4kg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Number of LEDs	80 LED/mt
Light Source Lumen	3380 lm/m
Item Lumen	2124 lm/m
Color Temperature	Warm white 3000K
Optics	Opal
Typical CRI	85
Minimum CRI	80
Luminous Flux Maintenance	>100.000 h L80 B10
Energy Efficiency Class	 D
Electrical specifications 1	
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	23W/ml
Driver	Included
Control System	DALI
Power Supply Type	Costant Current
Driver Output	350mA
Driver Input	220 - 240 VAC 50/60 Hz

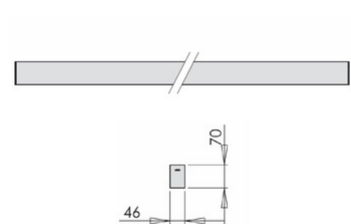

CE