





Millet Suspension lamp

Extruded aluminium profile with 10 cm pitch cut-to-size, with opal or prismatic polycarbonate diffuser UGR<19. Available in 3000K or 4000K temperatures. Integrated for On/Off and DALI power supplies, emergency module available on request. Designed to be installed suspended, with L 2000 mm cable, other sizes on request.

| | |
|--------------------------------------|--|
| Code | 6968-22-222 |
| Type | Light Line Profiles - Suspension lamp |
| Designer | S.T. Fabas Luce |
| Eancode | 8019282519874 |
| Customs tariff | 94054239 |
| Color | Aluminum |
| Material | Aluminum frame and polycarbonate |
| IP | IP40 |
| IK | 08 |
| Insulation Class |  CL1 |
| Operating ambient temperature | -25C° +45C° |
| Years of warranty | 5 |
| Made In | Italy |
| Item Dimensions | 46x70xMAX 2000mm - 2.20/mkg |

| | |
|----------------------------------|---|
| Light Source 1 | |
| Light source | LED Built-in |
| LED Characteristics | SMD |
| Number of LEDs | 80 LED/mt |
| Light Source Lumen | 3380 lm/m |
| Item Lumen | 2196 lm/m |
| Color Temperature | Warm white 3000K |
| Optics | Prismatic |
| Typical CRI | 85 |
| Minimum CRI | 80 |
| Luminous Flux Maintenance | >100.000 h L80 B10 |
| UGR | <19 |
| Energy Efficiency Class |  |

| | |
|------------------------------------|------------------------|
| Electrical specifications 1 | |
| Input Voltage | 220/240V AC 50/60Hz |
| Total Absorbed Power | 23W/ml |
| Driver | Included |
| Control System | DALI |
| Power Supply Type | Costant Current |
| Driver Output | 350mA |
| Driver Input | 220 - 240 VAC 50/60 Hz |

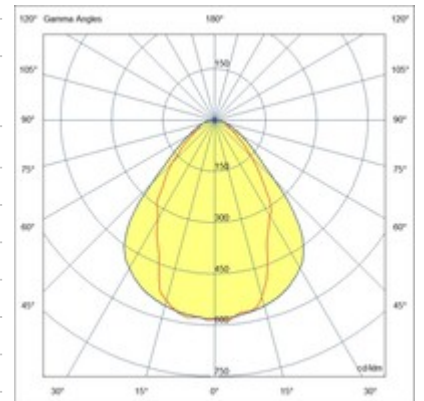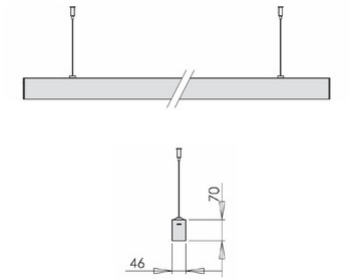

CE