
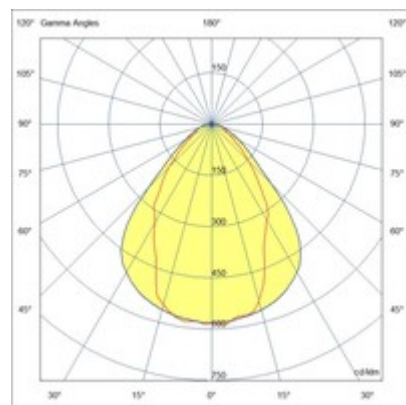



## Millet Suspension lamp

Extruded aluminium profile with 10 cm pitch cut-to-size, with opal or prismatic polycarbonate diffuser UGR<19. Available in 3000K or 4000K temperatures. Integrated for On/Off and DALI power supplies, emergency module available on request. Designed to be installed suspended, with L 2000 mm cable, other sizes on request.

|                                      |                                                                                       |
|--------------------------------------|---------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6968-62-202</b>                                                                    |
| <b>Type</b>                          | Light Line Profiles - Suspension lamp                                                 |
| <b>Designer</b>                      | S.T. Fabas Luce                                                                       |
| <b>Eancode</b>                       | 8019282519959                                                                         |
| <b>Customs tariff</b>                | 94054239                                                                              |
| <b>Color</b>                         | Black                                                                                 |
| <b>Material</b>                      | Aluminum frame and polycarbonate                                                      |
| <b>IP</b>                            | IP40                                                                                  |
| <b>IK</b>                            | 08                                                                                    |
| <b>Insulation Class</b>              |  CL1 |
| <b>Operating ambient temperature</b> | -25C° +45C°                                                                           |
| <b>Years of warranty</b>             | 5                                                                                     |
| <b>Made In</b>                       | Italy                                                                                 |
| <b>Item Dimensions</b>               | 46x70xMAX 2000mm - 2.20/mkg                                                           |
| <b>Light Source 1</b>                |                                                                                       |
| <b>Light source</b>                  | LED Built-in                                                                          |
| <b>LED Characteristics</b>           | SMD                                                                                   |
| <b>Number of LEDs</b>                | 80 LED/mt                                                                             |
| <b>Light Source Lumen</b>            | 3380 lm/m                                                                             |
| <b>Item Lumen</b>                    | 2196 lm/m                                                                             |
| <b>Color Temperature</b>             | Warm white 3000K                                                                      |
| <b>Optics</b>                        | Prismatic                                                                             |
| <b>Typical CRI</b>                   | 85                                                                                    |
| <b>Minimum CRI</b>                   | 80                                                                                    |
| <b>Luminous Flux Maintenance</b>     | >100.000 h L80 B10                                                                    |
| <b>UGR</b>                           | <19                                                                                   |
| <b>Energy Efficiency Class</b>       |  D |
| <b>Electrical specifications 1</b>   |                                                                                       |
| <b>Input Voltage</b>                 | 220/240V AC 50/60Hz                                                                   |
| <b>Total Absorbed Power</b>          | 23W/ml                                                                                |
| <b>Driver</b>                        | Included                                                                              |
| <b>Control System</b>                | On/Off                                                                                |
| <b>Power Supply Type</b>             | Costant Current                                                                       |
| <b>Driver Output</b>                 | 350mA                                                                                 |
| <b>Driver Input</b>                  | 220 - 240 VAC 50/60 Hz                                                                |

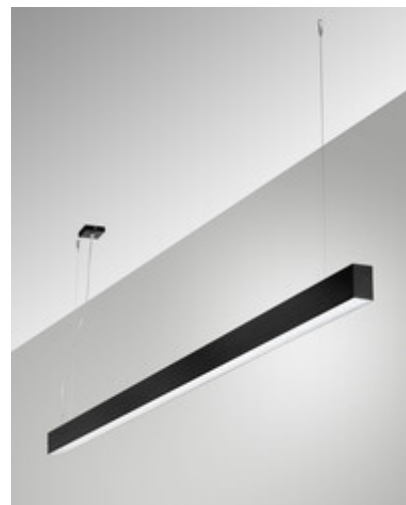

CE