
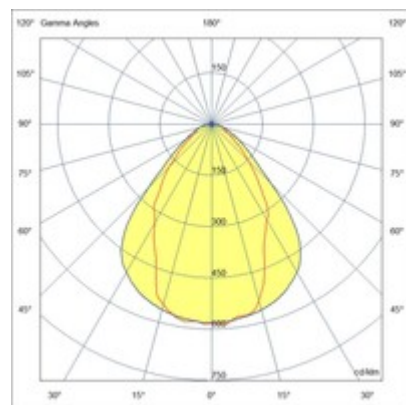



Millet Suspension lamp

Extruded aluminium profile with 10 cm pitch cut-to-size, with opal or prismatic polycarbonate diffuser UGR<19. Available in 3000K or 4000K temperatures. Integrated for On/Off and DALI power supplies, emergency module available on request. Designed to be installed suspended, with L 2000 mm cable, other sizes on request.

Code	6968-64-202
Type	Light Line Profiles - Suspension lamp
Designer	S.T. Fabas Luce
Eancode	8019282519942
Customs tariff	94054239
Color	Black
Material	Aluminum frame and polycarbonate
IP	IP40
IK	08
Insulation Class	 CL1
Operating ambient temperature	-25C° +45C°
Years of warranty	5
Made In	Italy
Item Dimensions	46x70xMAX 2000mm - 2.20/mkg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Number of LEDs	80 LED/mt
Light Source Lumen	3580 lm/m
Item Lumen	2346 lm/m
Color Temperature	Natural white 4000 K
Optics	Prismatic
Typical CRI	85
Minimum CRI	80
Luminous Flux Maintenance	>100.000 h L80 B10
UGR	<19
Energy Efficiency Class	 A+ C
Electrical specifications 1	
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	23W/ml
Driver	Included
Control System	On/Off
Power Supply Type	Costant Current
Driver Output	350mA
Driver Input	220 - 240 VAC 50/60 Hz

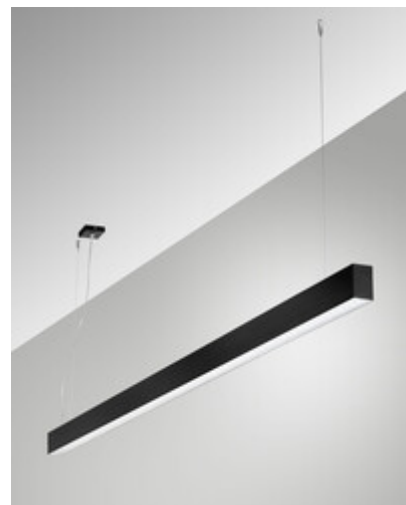

CE