Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

Millet Recessed with frame

Extruded aluminium profile with 10 cm pitch cut-to-size, with opal or prismatic polycarbonate diffuser UGR<19. Available in 3000K or 4000K temperatures. Integrated for On/Off and DALI power supplies, emergency module available on request. Designed to be installed on ceiling or wall, both vertically and horizontally.

Code	**6970-54-222**
Type	Light Line Profiles – Recessed with frame
Designer	S.T. Fabas Luce
Eancode	8019282520276
Customs tariff	94054239
Color	White
Material	Aluminum frame and polycarbonate
IP	IP40
IK	08
Insulation Class	CL1
Hole dimension	50 x L + 20
Operating ambient temperature	-25C° +45C°
Years of warranty	5
Made In	Italy
Item Dimensions	55.5x122mm - 2,2/mkg



	Light Source 1
Light source	LED Built-in
LED Characteristics	SMD
Number of LEDs	80 LED/mt
Light Source Lumen	3580 lm/m
Item Lumen	2346 lm/m
Color Temperature	Natural white 4000 K
Optics	Prismatic
Typical CRI	85
Minimum CRI	80
Luminous Flux Maintenance	>100.000 h L80 B10
UGR	<19
Energy Efficiency Class	A↑G C

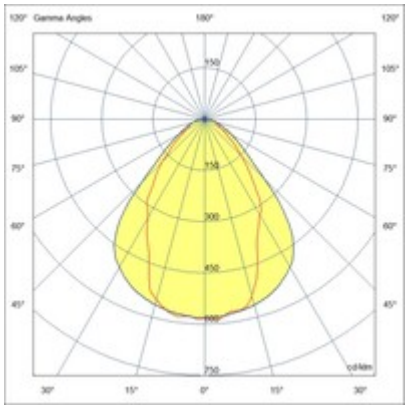

	Electrical specifications 1
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	23W/ml
Driver	Included
Control System	DALI
Power Supply Type	Costant Current
Driver Output	350mA
Driver Input	220 - 240 VAC 50/60 Hz