





## RUBENS 16W ON-OFF

Adjustable floodlight with adapter for installation on a track, mains voltage for 16W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 15°, 28°, 41° optics.

|                                      |  |
|--------------------------------------|--|
| <b>Code</b>                          | <b>6973-94-564</b>   |
| <b>Type</b>                          | Track spotlight  |
| <b>Designer</b>                      | S.T. Fabas Luce  |
| <b>Eancode</b>                       | 8019282527213  |
| <b>Customs tariff</b>                | 94054239   |
| <b>Color</b>                         | Black  |
| <b>Material</b>                      | Aluminum frame   |
| <b>IP</b>                            | IP20   |
| <b>IK</b>                            | 04   |
| <b>Insulation Class</b>              | <br>CL2 |
| <b>Operating ambient temperature</b> | -20°C + 30°C   |
| <b>Years of warranty</b>             | 5  |
| <b>Made In</b>                       | Italy  |
| <b>Item Dimensions</b>               | 95mm Ø55mm - 0.38kg  |
| <b>Packaging Dimensions</b>          | 200x165x70mm - 0.52kg  |
| <b>Light Source 1</b>                |  |
| <b>Light source</b>                  | LED Built-in   |
| <b>LED Characteristics</b>           | COB  |
| <b>Light Source Lumen</b>            | 1312 lm  |
| <b>Item Lumen</b>                    | 969 lm   |
| <b>Color Temperature</b>             | Natural white 4000 K   |
| <b>Optics</b>                        | 41°  |
| <b>Typical CRI</b>                   | 97   |
| <b>Minimum CRI</b>                   | 90   |
| <b>Luminous Flux Maintenance</b>     | 50.000h L80 B10  |
| <b>Energy Efficiency Class</b>       |       |
| <b>Electrical specifications 1</b>   |  |
| <b>Input Voltage</b>                 | 220/240V AC 50/60Hz  |
| <b>Total Absorbed Power</b>          | 16W  |
| <b>Driver</b>                        | Included   |
| <b>Power Factor</b>                  | >0,9   |
| <b>Control System</b>                | On/Off   |

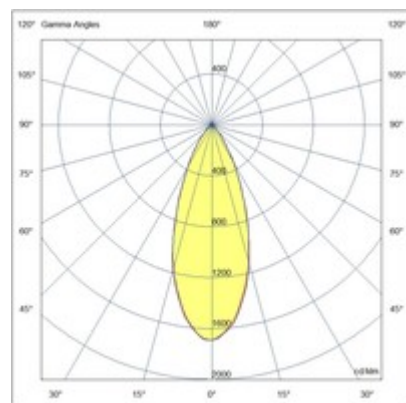

CE