


## RUBENS 28W ON-OFF

Adjustable floodlight with adapter for installation on a track, mains voltage for 28W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 16°, 21°, 43° optics.

|                                    |                                                                                       |
|------------------------------------|---------------------------------------------------------------------------------------|
| Code                               | 6974-94-364                                                                           |
| Type                               | Track spotlight                                                                       |
| Designer                           | S.T. Fabas Luce                                                                       |
| Eancode                            | 8019282527435                                                                         |
| Customs tariff                     | 94054239                                                                              |
| Color                              | Black                                                                                 |
| Material                           | Aluminum frame                                                                        |
| IP                                 | IP20                                                                                  |
| IK                                 | 04                                                                                    |
| Insulation Class                   |  CL2 |
| Operating ambient temperature      | -20°C + 35°C                                                                          |
| Years of warranty                  | 5                                                                                     |
| Made In                            | 5                                                                                     |
| Item Dimensions                    | 118mm Ø70mm - 0.59kg                                                                  |
| Packaging Dimensions               | 90x210x210mm - 0.74kg                                                                 |
| <b>Light Source 1</b>              |                                                                                       |
| Light source                       | LED Built-in                                                                          |
| LED Characteristics                | COB                                                                                   |
| Light Source Lumen                 | 2720 lm                                                                               |
| Item Lumen                         | 2370 lm                                                                               |
| Color Temperature                  | Natural white 4000 K                                                                  |
| Optics                             | 21°                                                                                   |
| Typical CRI                        | 97                                                                                    |
| Minimum CRI                        | 90                                                                                    |
| Luminous Flux Maintenance          | 50.000h L80 B10                                                                       |
| Energy Efficiency Class            |    |
| <b>Electrical specifications 1</b> |                                                                                       |
| Input Voltage                      | 220/240V AC 50/60Hz                                                                   |
| Total Absorbed Power               | 28W                                                                                   |
| Driver                             | Included                                                                              |
| Power Factor                       | >0,9                                                                                  |
| Control System                     | On/Off                                                                                |
| Driver Input                       | 220-240V AC                                                                           |

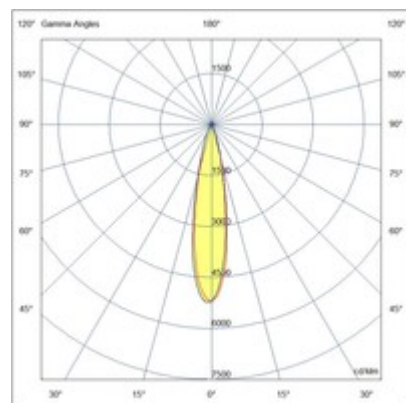

CE