
Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

RUBENS 28W ON-OFF


Adjustable floodlight with adapter for installation on a track, mains voltage for 28W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 16°, 21°, 43° optics.



Code	**6974-94-564**
Type	Track spotlight
Designer	S.T. Fabas Luce
Eancode	8019282527442
Customs tariff	94054239
Color	Black
Material	Aluminum frame
IP	IP20
IK	04
Insulation Class	CL2
Operating ambient temperature	-20°C + 35°C
Years of warranty	5
Item Dimensions	118mm Ø70mm - 0.59kg
Packaging Dimensions	90x210x210mm - 0.74kg

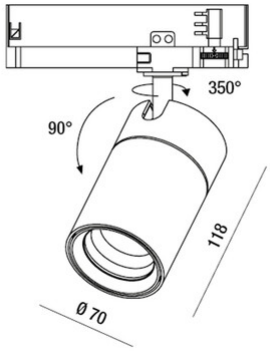

	Light Source 1
Light source	LED Built-in
LED Characteristics	COB
Light Source Lumen	2720 lm
Item Lumen	2145 lm
Color Temperature	Natural white 4000 K
Optics	43°
Typical CRI	97
Minimum CRI	90
Luminous Flux Maintenance	50.000h L80 B10
Energy Efficiency Class	A G E

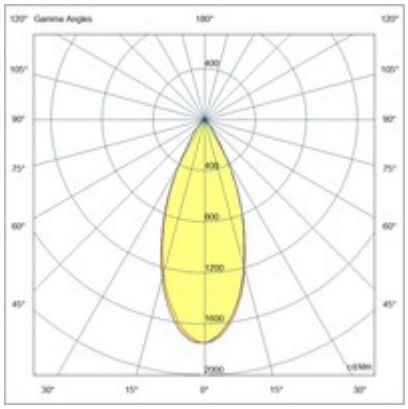

	Electrical specifications 1
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	28W
Driver	Included
Power Factor	>0,9
Control System	On/Off
Driver Input	220-240V AC

CE