
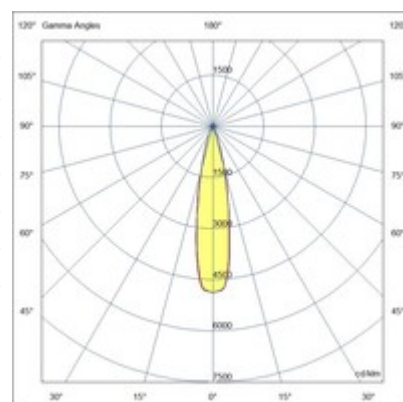


## RUBENS 36W ON-OFF

Adjustable floodlight with adapter for installation on a track, mains voltage for 36W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 21°, 36°, 45° optics.

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Code                          | 6975-92-264                                                                              |
| Type                          | Track spotlight                                                                          |
| Designer                      | S.T. Fabas Luce                                                                          |
| Eancode                       | 8019282527824                                                                            |
| Customs tariff                | 94054239                                                                                 |
| Color                         | Black                                                                                    |
| Material                      | Aluminum frame                                                                           |
| IP                            | IP20                                                                                     |
| IK                            | 04                                                                                       |
| Insulation Class              | <br>CL2 |
| Operating ambient temperature | -20°C +35°C                                                                              |
| Years of warranty             | 5                                                                                        |
| Item Dimensions               | 132mm Ø85mm - 0.8kg                                                                      |
| Packaging Dimensions          | 90x210x210mm - 0.92kg                                                                    |
|                               | <b>Light Source 1</b>                                                                    |
| Light source                  | LED Built-in                                                                             |
| LED Characteristics           | COB                                                                                      |
| Light Source Lumen            | 3800 lm                                                                                  |
| Item Lumen                    | 2831 lm                                                                                  |
| Color Temperature             | Warm white 3000K                                                                         |
| Optics                        | 21°                                                                                      |
| Typical CRI                   | 97                                                                                       |
| Minimum CRI                   | 90                                                                                       |
| Luminous Flux Maintenance     | 50.000h L80 B10                                                                          |
| Energy Efficiency Class       |       |
|                               | <b>Electrical specifications 1</b>                                                       |
| Input Voltage                 | 220/240V AC 50/60Hz                                                                      |
| Total Absorbed Power          | 36W                                                                                      |
| Driver                        | Included                                                                                 |
| Power Factor                  | >0,9                                                                                     |
| Control System                | On/Off                                                                                   |

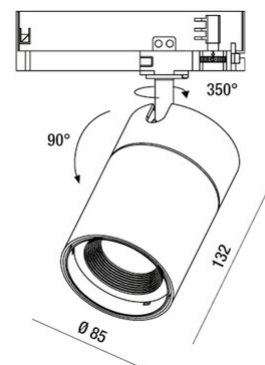

CE