
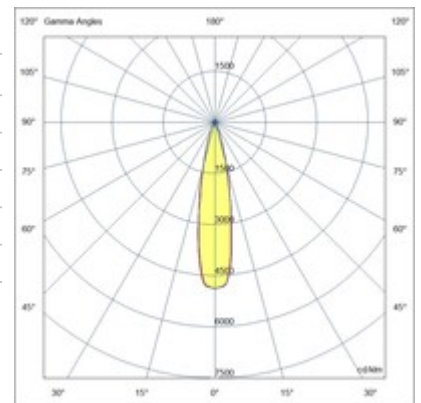


RUBENS 36W ON-OFF

Adjustable floodlight with adapter for installation on a track, mains voltage for 36W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 21°, 36°, 45° optics.

Code	6975-92-264	
Type	Track spotlight	
Designer	S.T. Fabas Luce	
Eancode	8019282527824	
Customs tariff	94054239	
Color	Black	
Material	Aluminum frame	
IP	IP20	
IK	04	
Insulation Class	CL2	
Operating ambient temperature	-20°C +35°C	
Years of warranty	5	
Item Dimensions	132mm Ø85mm - 0.8kg	
Packaging Dimensions	90x210x210mm - 0.92kg	
	Light Source 1	
Light source	LED Built-in	
LED Characteristics	COB	
Light Source Lumen	3800 lm	
Item Lumen	2831 lm	
Color Temperature	Warm white 3000K	
Optics	21°	
Typical CRI	97	
Minimum CRI	90	
Luminous Flux Maintenance	50.000h L80 B10	
Energy Efficiency Class	A ↑ G E	
	Electrical specifications 1	
Input Voltage	220/240V AC 50/60Hz	
Total Absorbed Power	36W	
Driver	Included	
Power Factor	>0,9	
Control System	On/Off	

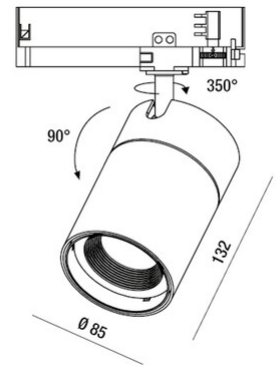

CE