
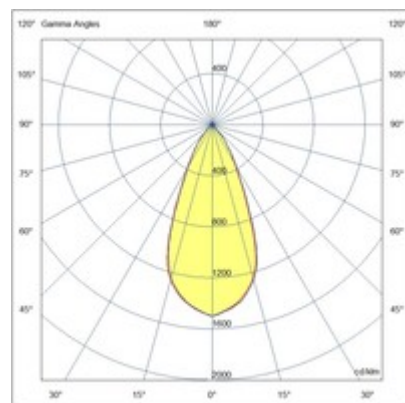


## RUBENS 36W ON-OFF

Adjustable floodlight with adapter for installation on a track, mains voltage for 36W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 21°, 36°, 45° optics.

|                                      |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6975-94-564</b>                                                                       |
| <b>Type</b>                          | Track spotlight                                                                          |
| <b>Designer</b>                      | S.T. Fabas Luce                                                                          |
| <b>Eancode</b>                       | 8019282527923                                                                            |
| <b>Customs tariff</b>                | 94054239                                                                                 |
| <b>Color</b>                         | Black                                                                                    |
| <b>Material</b>                      | Aluminum frame                                                                           |
| <b>IP</b>                            | IP20                                                                                     |
| <b>IK</b>                            | 04                                                                                       |
| <b>Insulation Class</b>              | <br>CL2 |
| <b>Operating ambient temperature</b> | -20°C +35°C                                                                              |
| <b>Years of warranty</b>             | 5                                                                                        |
| <b>Item Dimensions</b>               | 132mm Ø85mm - 0.8kg                                                                      |
| <b>Packaging Dimensions</b>          | 90x210x210mm - 0.92kg                                                                    |
| <b>Light Source 1</b>                |                                                                                          |
| <b>Light source</b>                  | LED Built-in                                                                             |
| <b>LED Characteristics</b>           | COB                                                                                      |
| <b>Light Source Lumen</b>            | 4000 lm                                                                                  |
| <b>Item Lumen</b>                    | 3074 lm                                                                                  |
| <b>Color Temperature</b>             | Natural white 4000 K                                                                     |
| <b>Optics</b>                        | 45°                                                                                      |
| <b>Typical CRI</b>                   | 97                                                                                       |
| <b>Minimum CRI</b>                   | 90                                                                                       |
| <b>Luminous Flux Maintenance</b>     | 50.000h L80 B10                                                                          |
| <b>Energy Efficiency Class</b>       |       |
| <b>Electrical specifications 1</b>   |                                                                                          |
| <b>Input Voltage</b>                 | 220/240V AC 50/60Hz                                                                      |
| <b>Total Absorbed Power</b>          | 36W                                                                                      |
| <b>Driver</b>                        | Included                                                                                 |
| <b>Power Factor</b>                  | >0,9                                                                                     |
| <b>Control System</b>                | On/Off                                                                                   |

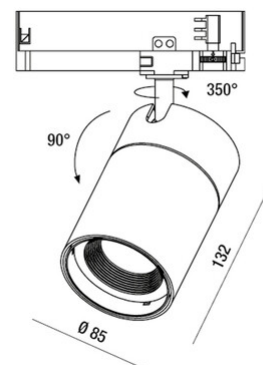

CE