




## Millet Wall lamp


Extruded aluminium profile with 10 cm pitch cut-to-size. Dual light emission, 23W/m downwards, 15W/m upwards. Diffuser in opal or prismatic polycarbonate UGR<19. Available in 3000K or 4000K temperatures. Integrated for On/Off and DALI power supplies, emergency module available on request. Designed to be installed on wall, both vertically and horizontally.

|                         |   |
|-------------------------|---|
| <b>Code</b>             | <b>6992-64-222</b>  |
| <b>Type</b>             | Light Line Profiles – Wall lamp   |
| <b>Designer</b>         | S.T. Fabas Luce   |
| <b>Eancode</b>          | 8019282556787   |
| <b>Customs tariff</b>   | 94054239  |
| <b>Color</b>            | Black   |
| <b>Material</b>         | Aluminum frame and polycarbonate  |
| <b>IP</b>               | IP40  |
| <b>IK</b>               | 08  |
| <b>Insulation Class</b> |  |

|                                      |                   |
|--------------------------------------|-------------------|
| <b>Operating ambient temperature</b> | -25C° +45C°       |
| <b>Years of warranty</b>             | 5                 |
| <b>Made In</b>                       | Italy             |
| <b>Item Dimensions</b>               | 46x70mm - 2.2/mkg |

|                                  | <b>Light Source 1</b>   | <b>Light Source 2</b>   |
|----------------------------------|---|---|
| <b>Light source</b>              | LED Built-in  | LED Included  |
| <b>LED Characteristics</b>       | SMD   | SMD   |
| <b>Number of LEDs</b>            | 80 LED/mt   | 140 LED/mt  |
| <b>Light Source Lumen</b>        | 3580 lm/m   | 1440 lm/m   |
| <b>Item Lumen</b>                | 2346 lm/m   | 1067 lm/m   |
| <b>Color Temperature</b>         | Natural white 4000 K  | Natural white 4000 K  |
| <b>Optics</b>                    | Prismatic   | Opal  |
| <b>Typical CRI</b>               | 85  |   |
| <b>Minimum CRI</b>               | 80  | 80  |
| <b>Luminous Flux Maintenance</b> | >100.000 h L80 B10  | >80.000 h L70 B50   |
| <b>UGR</b>                       | <19   |   |
| <b>Energy Efficiency Class</b>   |  |  |

|                             | <b>Electrical specifications 1</b> | <b>Electrical specifications 2</b> |
|-----------------------------|------------------------------------|------------------------------------|
| <b>Input Voltage</b>        | 220 / 240V AC 50/60 Hz             | 220 / 240V AC 50/60 Hz             |
| <b>Total Absorbed Power</b> | 23W/ml                             | 15W/ml                             |
| <b>Driver</b>               | Included                           | Included                           |
| <b>Control System</b>       | DALI                               | DALI                               |
| <b>Power Supply Type</b>    | Costant Current                    | Costant Current                    |
| <b>Driver Output</b>        | 350mA                              | 24V DC                             |
| <b>Driver Input</b>         | 220 - 240 VAC 50/60 Hz             | 220 - 240 VAC 50/60 Hz             |

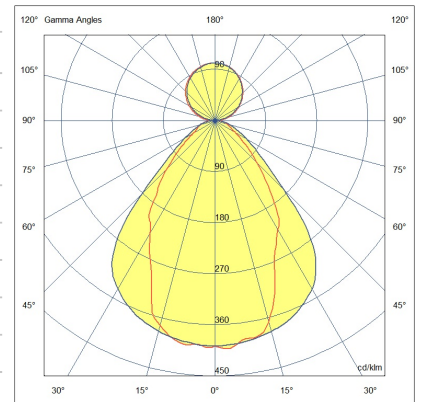

CE