







# Leo

Circular suspension with double ring with opal diffuser. Thanks to the double ring, one 800 mm with direct light and the other 600 mm with indirect light, this suspension guarantees high levels of illuminance. Available only in 3000K version, white or black finishing. It has a source emission of about 7050 lm. Design and size make Leo an elegant decorative and furnishing element, its performance makes it very versatile. Leo adapts to all environments, even large ones. Perfect for reception (reception, cash desks, hall) and suitable for general lighting of shops, bars, restaurants and meeting rooms, also suitable for the home environment

|                                      |   |
|--------------------------------------|---|
| <b>Code</b>                          | <b>6993-32-956</b>  |
| <b>Type</b>                          | Suspension lamp   |
| <b>Eancode</b>                       | 8019282553519   |
| <b>Customs tariff</b>                | 94051190  |
| <b>Color</b>                         | White   |
| <b>Material</b>                      | Aluminum white frame / Opal white diffuser  |
| <b>IP</b>                            | IP20  |
| <b>IK</b>                            | 07  |
| <b>Insulation Class</b>              |    |
| <b>Operating ambient temperature</b> | 0°C +35°C   |
| <b>Item Dimensions</b>               | MAX 2000mm Ø800mm - 2.9kg   |
| <b>Packaging Dimensions</b>          | 80x830x830mm - 4.6kg  |
| <b>Light Source 1</b>                |   |
| <b>Light source</b>                  | LED Built-in  |
| <b>LED Characteristics</b>           | SMD   |
| <b>Light Source Lumen</b>            | 7050 lm   |
| <b>Item Lumen</b>                    | 4900 lm   |
| <b>Color Temperature</b>             | Warm white 3000K  |
| <b>Optics</b>                        | Diffused beam   |
| <b>Typical CRI</b>                   | >80   |
| <b>Energy Efficiency Class</b>       |  |
| <b>Electrical specifications 1</b>   |   |
| <b>Input Voltage</b>                 | 220 / 240V AC 50/60 Hz  |
| <b>Total Absorbed Power</b>          | 65W   |
| <b>Driver</b>                        | Included  |
| <b>Power Factor</b>                  | >0,9  |
| <b>Control System</b>                | DALI  |

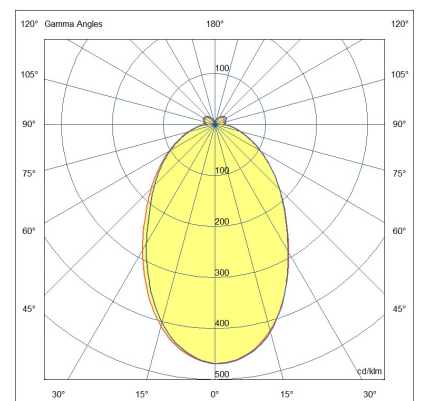

CE