




## Kate IP65

Round polycarbonate and aluminum profile, Ø25 mm, for outdoor direct illumination of rooms, walls and objects. Fixing with adjustable springs, 360° rotation, dull chrome brackets on demand. Provided wired with a 1 m neoprene cable. IP65 protection rating. Customized product cut each 10 cm.

<b>Code</b>	<b>6996-04-001</b>
<b>Type</b>	Light Line Profiles
<b>Designer</b>	S.T. Fabas Luce
<b>Eancode</b>	8019282534730
<b>Customs tariff</b>	94054239
<b>Color</b>	Shiny anodized aluminum
<b>Material</b>	Aluminum frame
<b>IP</b>	IP65
<b>IK</b>	08
<b>Insulation Class</b>	
<b>Operating ambient temperature</b>	-20°C +50°C
<b>Years of warranty</b>	3
<b>Made In</b>	Italy
<b>Item Dimensions</b>	Ø250mm - 0,75/mkg
<b>Light Source 1</b>	
<b>Light source</b>	LED Built-in
<b>LED Characteristics</b>	SMD
<b>Number of LEDs</b>	160 LED/mt
<b>Light Source Lumen</b>	2800 lm/m
<b>Item Lumen</b>	1550 lm/m
<b>Color Temperature</b>	Natural white 4000 K
<b>Optics</b>	120° / 120° opal / 60°
<b>Minimum CRI</b>	>80
<b>Energy Efficiency Class</b>	
<b>Electrical specifications 1</b>	
<b>Input Voltage</b>	24V DC
<b>Total Absorbed Power</b>	20W/ml
<b>Driver</b>	Not included

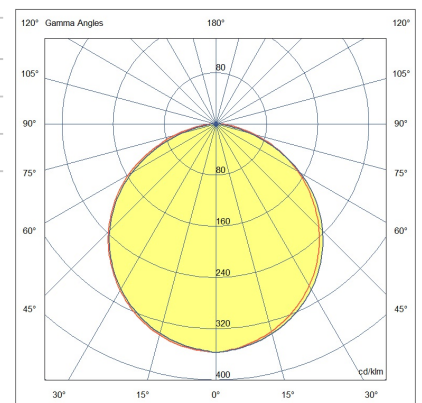

CE