




Kate IP65

Round polycarbonate and aluminum profile, Ø25 mm, for outdoor direct illumination of rooms, walls and objects. Fixing with adjustable springs, 360° rotation, dull chrome brackets on demand. Provided wired with a 1 m neoprene cable. IP65 protection rating. Customized product cut each 10 cm.

Code	6996-04-003
Type	Light Line Profiles
Designer	S.T. Fabas Luce
Eancode	8019282534778
Customs tariff	94054239
Color	Shiny anodized aluminum
Material	Aluminum frame
IP	IP65
IK	08
Insulation Class	
Operating ambient temperature	-20°C +50°C
Years of warranty	3
Made In	Italy
Item Dimensions	Ø250mm - 0,75/mkg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Number of LEDs	140 LED/mt
Light Source Lumen	1200 lm/m
Item Lumen	725 lm/m
Color Temperature	Natural white 4000 K
Optics	120° / 120° opal / 60°
Minimum CRI	>80
Energy Efficiency Class	
Electrical specifications 1	
Input Voltage	24V DC
Total Absorbed Power	9,6W/ml
Driver	Not included

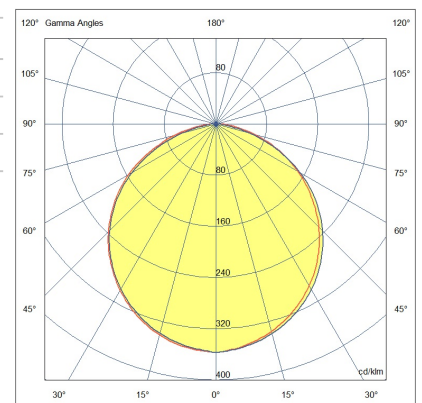

CE