
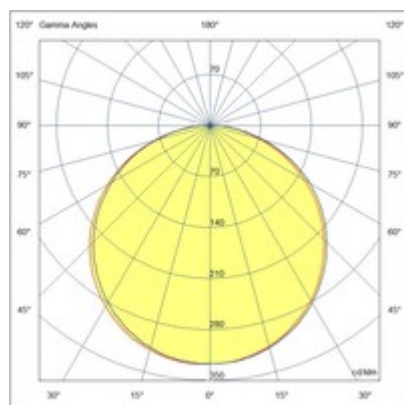


## Gant IP40

Recessed extruded anodized aluminum profile caps and fixing springs included. Customized product cut each 10 cm. Indoor aluminum LED bar.

|                                      |                                                                                            |
|--------------------------------------|--------------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6998-02-003</b>                                                                         |
| <b>Type</b>                          | Light Line Profiles                                                                        |
| <b>Designer</b>                      | S.T. Fabas Luce                                                                            |
| <b>Eancode</b>                       | 8019282534839                                                                              |
| <b>Customs tariff</b>                | 94054239                                                                                   |
| <b>Color</b>                         | Shiny anodized aluminum                                                                    |
| <b>Material</b>                      | Aluminum frame                                                                             |
| <b>IP</b>                            | IP40                                                                                       |
| <b>IK</b>                            | 07                                                                                         |
| <b>Insulation Class</b>              | <br>CL3   |
| <b>Hole dimension</b>                |  19mm x L |
| <b>Operating ambient temperature</b> | -20°C +50°C                                                                                |
| <b>Years of warranty</b>             | 3                                                                                          |
| <b>Made In</b>                       | Italy                                                                                      |
| <b>Item Dimensions</b>               | 16x16mm - 0,38/mkg                                                                         |
| <b>Light Source 1</b>                |                                                                                            |
| <b>Light source</b>                  | LED Built-in                                                                               |
| <b>LED Characteristics</b>           | SMD                                                                                        |
| <b>Number of LEDs</b>                | 140 LED/mt                                                                                 |
| <b>Light Source Lumen</b>            | 1150 lm/m                                                                                  |
| <b>Item Lumen</b>                    | 568 lm/m                                                                                   |
| <b>Color Temperature</b>             | Warm white 3000K                                                                           |
| <b>Optics</b>                        | 120° / 120° opal / 60°                                                                     |
| <b>Minimum CRI</b>                   | >80                                                                                        |
| <b>Energy Efficiency Class</b>       |  E      |
| <b>Electrical specifications 1</b>   |                                                                                            |
| <b>Input Voltage</b>                 | 24V DC                                                                                     |
| <b>Total Absorbed Power</b>          | 9,6W/ml                                                                                    |
| <b>Driver</b>                        | Not included                                                                               |

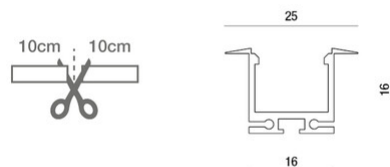

CE